Thermic 13 H

CRANKSHAFT



T.V. Thermal Valve

Standard equipment:

• 6.601.0001 Gun PRO S'10 3/8" M with quick connection



• 6.602.0044 Lance 900 mm with quick connection.



• 3.103.0050 Nozzle type 045




• 4.618.0143 High pressure hose 10 m



Optional:

• Suction hose with check valve 5.012.0319

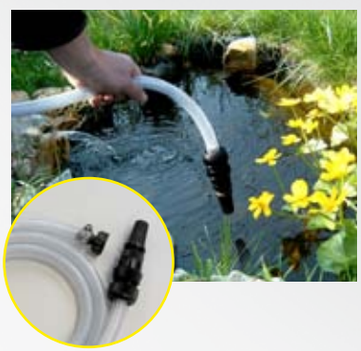

Equipped with:

• Three ceramic pistons, brass linear pump head. • 1500 RPM reducer between engine and pump. • Automatic RPM regulation. • By-pass with safety valve. • Suction and delivery S/S valves. • 13 HP **Honda** GX 390 unleaded gasoline engine. • Integrated detergent suction with external suction probe. • Pressure regulator. • Glicerine pressure gauge. • Suction hose with check valve **(optional)**. • Heavy duty steel frame.

	Thermic 13 H
code	8.601.00133
operat. pressure	250 bar-3625 psi
delivery rate	1020 l/h-4.49 GPM
engine type/hp	Honda GX 390/13
pump type/RPM	CL5/1700 RPM
max. temp. inlet/oulet	40 °C